

Automatic Washbasin Mixer SLU 76NB



SANELA
we make water cool®




Characteristics



- includes Bluetooth control
(Sanelia Control app available for download)
- economical aerator, rate of flow 6 l/min
- hygienic flush
- possibility of water temperature adjustment by mixer and follow-up plug by cover
- electromagnetic valve is in the tap body
- is destined for cold and hot water, temperature is regulated by mixer
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 – 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity
- START/STOP program
- parameter setting and communication with the electronics via the Sanelia Control app (Bluetooth) or the SLD 03

Dimensions

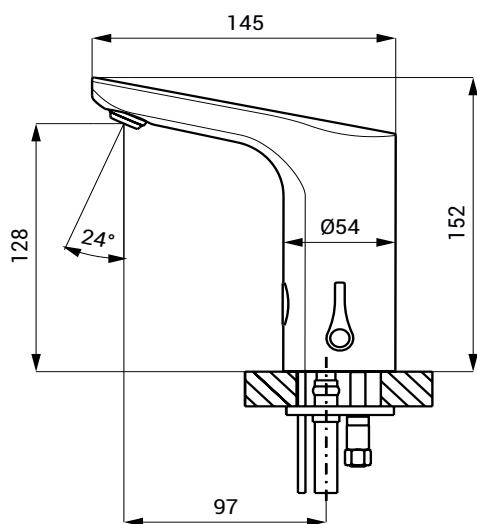

Technical Specification

Dimensions	152 x 145 mm
Weight	2,04 kg
Operating voltage	6 V
Power input	2 W
Battery life	approx. 2 years (100 uses per day)
▪ 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh	
Active range	0,13 - 0,19 m
▪ standard	0,05 - 0,15 m
▪ START/STOP program	0,1 - 0,6 MPa
Recommended flow pressure	6 l/min. (inf. data)
Rate of flow	Water inlet male thread G 1/2"

Supply Specification

SLU 76NB - Supply No. 03766

faucet with mixer, electronics including Bluetooth module and solenoid valve, coupling hoses, filter and check valve (2 pcs.), cover for temperature mixer, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case

Recommended Accessories

SLD 03 - Supply No. 07030

remote control for an adjustment of parameters

SLA 36 - Supply No. 06360

set of 4 AA alkaline batteries, 1,5 V, 2700 mAh

SLA 55A - Supply No. 06550

water-saving aerator 3,8 l/min

SLA 55B - Supply No. 06551

water-saving aerator 1,9 l/min

SANELA CONTROL APP

paid Sanelia control application available for download on the App Store and Google Play