

# Coin and Token Shower Timers for Four to Eight Showers

## SLZA 02LN




### Characteristics



- **hygienic flush**
- **vandal-proof**
- **choice of shower by the user**
  - before inserting a coin or token the user chooses the requested shower by the push of the button, the number of shower is shown on the display
- **interactive control**
  - the user can start or stop the water directly in the shower
  - 30 s before the end of water supply the user is warned by interrupting of water flow
  - the device adds up the coins but does not return
  - parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value, display contrast, possibility switch off some from showers)
  - marking of the buttons by symbols could be made to order
  - the possibility of obtaining the statistical information, device diagnostics
  - lockable
  - for indoor use, temperature range +5 to +40 °C
  - material stainless steel AISI 304 (1.4301)
  - brushed finish

### Installation Drawing

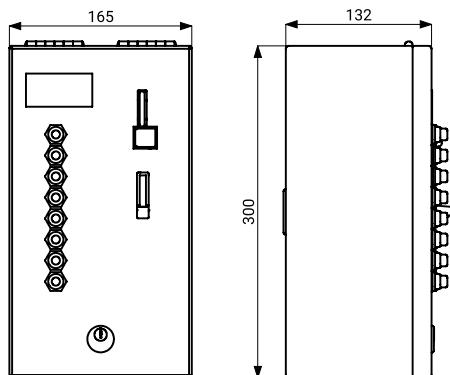

### Technical Specification

Dimensions	300 x 165 x 132 mm
Weight	4,08 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	65 W (depends on the accessories and the number of showers)
Accepted coins	1 and 2 €, token (other currencies on request)
Showering time	5 - 1200 sec.

## Supply Specification

**SLZA 02LN** - Supply No. 88029 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)

## Required Accessories



**SLZA 15** **88150** Valves distributor on DIN rail

**SLZA 17** **88170** Push buttons distributor on DIN rail



**SLZA 20P** **88207** Shower control with piezo button  
- premixed water



**SLZA 20PH** **88208** Shower control with piezo button  
- for cold and hot water, temperature regulated  
by mixer



**SLZA 20PT** **88209** Shower control with piezo button  
- for cold and hot water, temperature regulated  
by thermostatic mixer

- thermostatic valve nut spanner SLA 64



**SLZA 21P** **88217** Stainless steel shower panel with piezo  
button - premixed water



**SLZA 21PH** **88218** Stainless steel shower panel with piezo  
button - for cold and hot water, temperature  
regulated by mixer



**SLZA 21PT**

**88219**

Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by thermostatic mixer

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	- Supply No. 07050	remote control for an adjustment of parameters
SLA 03	- Supply No. 06030	vandal-proof shower head
SLA 39	- Supply No. 06390	vandal-proof shower head
SLA 40	- Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 64	- Supply No. 06640	thermostatic valve nut spanner (SLZA 20PT)
SLZA 50	- Supply No. 88500	set of 50 pcs. of tokens for coin device