




Characteristics



- includes Bluetooth control
(Sanela control app available for download)
- **vandal-proof design**
- Programmable timer switch for urinal troughs
SLPN 02 (Z) - SLPN 05 (Z)
- Parameter settings via Bluetooth application Sanela control
- 7-day adjustable schedule for selecting individual days or the entire week
- 24-hour schedule for activating the flush within the day
- Flush interval adjustable from 00:01 to 99:59 hours
- Flush duration adjustable from 0.5s to 15.5s
- After switching on the 230 V AC power supply, the SLP 01Z starts flushing according to the set interval
- brushed finish

Building preparation

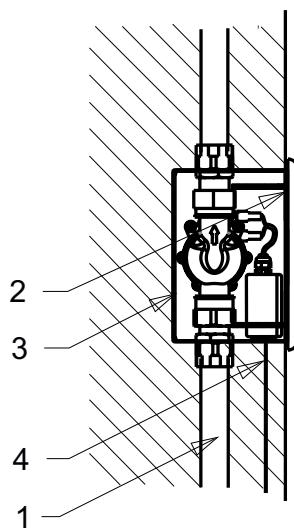

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - mounting box
- 4 - power supply input

Technical Specification

Stainless steel cover dimensions	170 x 170 x 10 mm
Mounting box dimensions	145 x 155 x 100 mm
Operating voltage	230 V AC/50 Hz
Recommended working pressure	0.15 - 0.6 MPa
Flow rate	70 l/min at pressure 0.15 MPa (informative value)
Water inlet	cross-section min. 32 mm (PN 16) external thread min. G 1"
Water outlet	external thread G 1"

Supply Specification

SLP 01ZX - Supply No. 11011

stainless steel cover with electronics including Bluetooth module, stainless steel mounting box with fittings, power supply, Sanela control app available for download on the App Store and Google Play