

# Coin and Token Shower Timers for One Shower SLZA 03N




## Characteristics



- hygienic flush
- vandal-proof
- interactive control
- after inserting a coin or a token the device starts water flow on several seconds in the shower
- the user can start and stop the water directly in the shower
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value)
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

## Installation Drawing

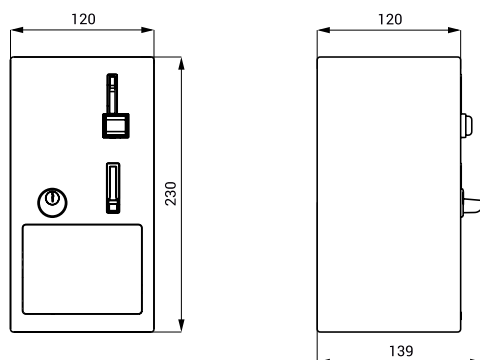

## Technical Specification

<b>Dimensions</b>	230 x 139 x 120 mm
<b>Weight</b>	4,5 kg
<b>Thickness of material</b>	1,5 mm
<b>Operating voltage</b>	24 V DC
<b>Power input</b>	10 W (2,5 W in sleep mode)
<b>Accepted coins</b>	1 and 2 €, token (other currencies on request)
<b>Showering time</b>	5 - 1200 sec.

## Supply Specification

**SLZA 03N** - **Supply No. 88033** stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)

## Required Accessories



**SLZA 20P**

**88207**

Shower control with piezo button  
- premixed water



**SLZA 20PH**

**88208**

Shower control with piezo button  
- for cold and hot water, temperature regulated by mixer



<b>SLZA 20PT</b>	<b>88209</b>	Shower control with piezo button - for cold and hot water, temperature regulated by thermostatic mixer
------------------	--------------	---

- thermostatic valve nut spanner SLA 64



<b>SLZA 21P</b>	<b>88217</b>	Stainless steel shower panel with piezo button - premixed water
-----------------	--------------	--



<b>SLZA 21PH</b>	<b>88218</b>	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by mixer
------------------	--------------	--



<b>SLZA 21PT</b>	<b>88219</b>	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by thermostatic mixer
------------------	--------------	---

## Recommended Accessories

<b>SLZ 01Y</b>	- <b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 1 pc. of shower
<b>SLZ 01Z</b>	- <b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 3 pcs. of showers
<b>SLZ 04Y</b>	- <b>Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 1 pc. of shower
<b>SLZ 04Z</b>	- <b>Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of showers
<b>SLZ 04X</b>	- <b>Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
<b>SLD 05</b>	- <b>Supply No. 07050</b>	remote control for an adjustment of parameters
<b>SLA 64</b>	- <b>Supply No. 06640</b>	thermostatic valve nut spanner (SLZA 20PT)
<b>SLZA 50</b>	- <b>Supply No. 88500</b>	set of 50 pcs. of tokens for coin device